

## SPECIFICATION SHEET

### APPLICATIONS

- Suction outlet sumps up to 8"
- Retrofit smaller 5" sumps, using additional knockouts
- Single and multiple drain applications

### FEATURES

- 27 sq. in. of open surface area, minimizes "differential hold down forces" and risk for entrapment
- Certified safe flow rate of 123 GPM at 1.5 FPS
- ASME/ANSI A112.19.8 b 2008 standard compliant
- Wall or floor drain installation
- UV protected and chemical resistant PVC material
- Universal fastener, security tool and screws included (12 piece #316 stainless steel screws and security tool)


### AVAILABLE ACCESSORIES

#### DS MUD RING

- Constructed of rigid PVC material and beveled, ideal for smooth hydraulic flow
- Optional DS Mud Ring adapter ring attaches to existing sumps with 7 5/8" bolt pattern

#### DS MAa

- Bonds screws directly to concrete of pool or spa, sealing and protecting from moisture
- For sumpless applications OR damaged mud rings, this kit allows the drain cover to be screwed directly into the pool
- Up to 2.5" pipes

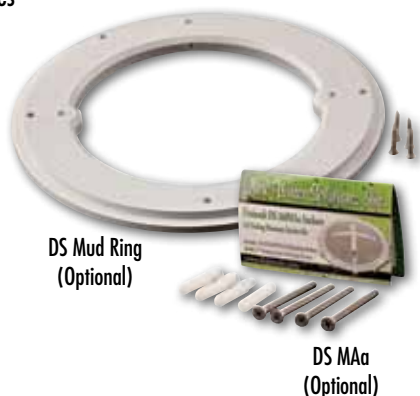


## DS 360M

### DRAINSAFE® ANTI-ENTRAPMENT DRAIN COVER



DS - 360 FLOW TESTS / Cv VALUE

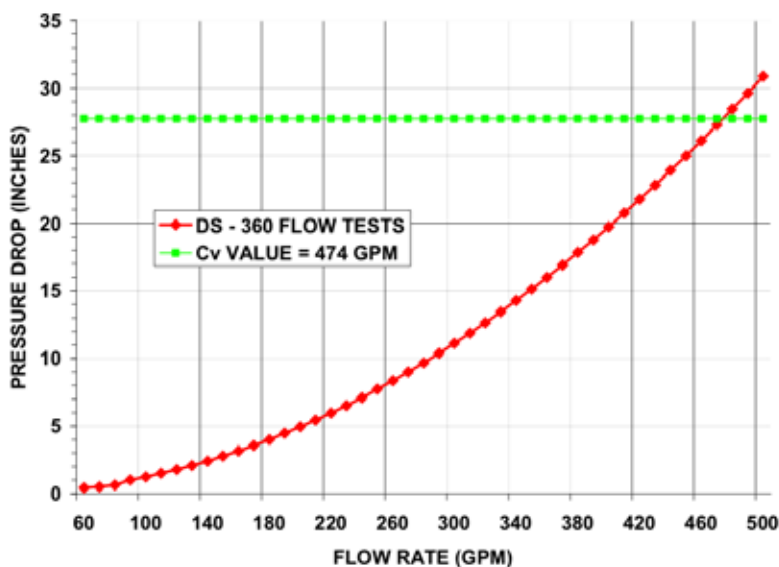

CATALOG NO.	UPC CODE	DESCRIPTION
DS 360M	95431	Drainsafe Anti-Entrapment Type Suction Outlet Cover
DS Uni-12 Screw Pack	95455	Universal fastener Screw Pack with Security tool
AVAILABLE ACCESSORIES		
CATALOG NO.	UPC CODE	DESCRIPTION
DS Mud Ring	95436	Drainsafe Mud Ring, Universal Fit
DS MAa	95435	Drainsafe Self-sealing Masonry Anchor Kit