

## SPECIFICATION SHEET

### APPLICATIONS

- Standard sumps with a 9" x 9" frame
- Retrofit smaller 5" sumps, using additional knockouts
- Single and multiple drain applications

### FEATURES


- Certified safe flow rate of 160 GPM at 1.9 FPS
- Meets ASME/ANSI A112.19.8 b 2008 standard
- For single and multiple drain applications
- Floor mounting only
- Adapter kit for secure attachment
- UV protected and chemical resistant PVC
- Set of 4 Phillips, orange head safety screws included



## DS 360 X DRAINSAFE® ANTI-ENTRAPMENT DRAIN COVER



DS - 360 FLOW TESTS / Cv VALUE

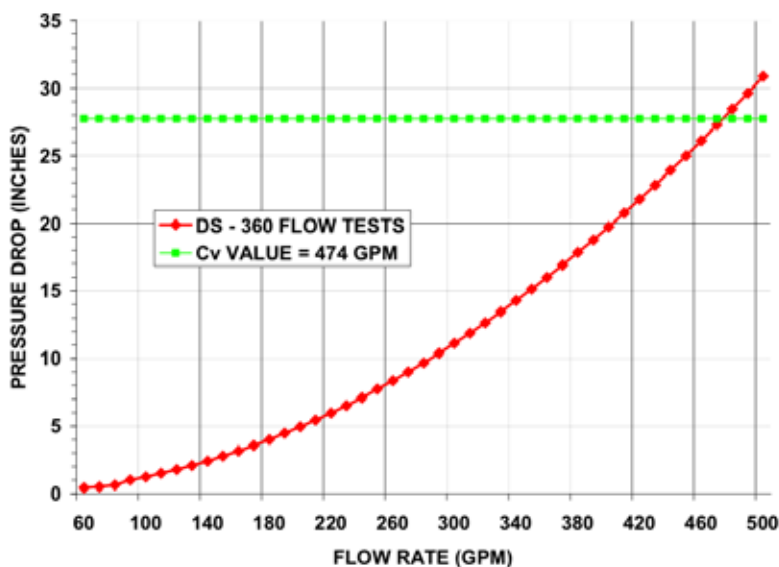

CATALOG NO.	UPC CODE	DESCRIPTION
DS 360 X	95451	Drainsafe Anti-Entrapment Type Suction Outlet Cover