

ANTI-ENTRAPMENT DRAIN COVERS VGBA2008




DS360M DRAINSAFE® ANTI-ENTRAPMENT DRAIN COVER

APPLICATION

The DS360M is designed for use with suction outlet sumps up to 8" in size, will retrofit smaller 5" sumps using additional knockouts. DS360M will function on dual drain as well as single suction outlets.

FEATURES

- » 27sq in open surface area minimizes "Differential Hold Down Forces"
- » Certified Safe flow of 123 GPM
- » ASME/ANSI A112.19.8 2007 Standard Compliant
- » Wall or floor drain installation, pool cleaner friendly
- » UV protected and chemical resistant PVC material
- » Universal fastener, security tool and screws included

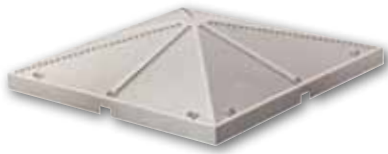


DS12X12P DRAINSAFE® ANTI-ENTRAPMENT DRAIN COVER

APPLICATION

The DS12X12P is designed to retrofit Pentair style frames, and functions on dual drain as well as single suction outlets.

FEATURES

- » Certified Safe flow of 250 GPM @ 1.5 FPS,
- » ASME/ANSI A112.19.8 2007 Standard Compliant
- » Wall or floor drain installation, pool cleaner friendly
- » UV protected and chemical resistant PVC material

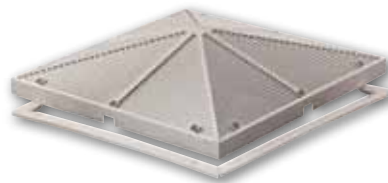

DS12X12H DRAINSAFE® ANTI-ENTRAPMENT DRAIN COVER


APPLICATION

The DS12X12H is designed to retrofit Hayward style frames, and functions on dual drain as well as single suction outlets.

FEATURES

- » Certified Safe flow of 250 GPM @ 1.5 FPS
- » ASME/ANSI A112.19.8 2007 Standard Compliant
- » Install on wall or floor drains, pool cleaner friendly
- » UV protected and chemical resistant PVC material

CATALOG NO.	UPC CODE	DESCRIPTION	SURFACE AREA (SQ. IN)	RETROFIT FRAME
DS360M	95431	Drainsafe Anti-Entrapment Type Suction Outlet Cover	27	N/A
DS12X12P	95429	Drainsafe 12 x 12" Anti-Entrapment Type Suction Outlet Cover	53	Pentair
DS12X12H	95430	Drainsafe 12 x 12" Anti-Entrapment Type Suction Outlet Cover	53	Hayward

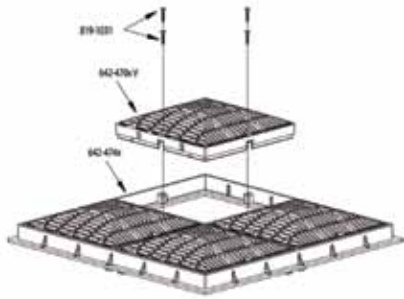

640-475XV WATERWAY™ ANTI-ENTRAPMENT DRAIN COVER

APPLICATION

Designed for single and multiple drain use, the 640-475XV works on dual drain as well as single suction outlets. This 18x18" grate assembly includes a frame, stainless steel screws and four 9x9" grates.

FEATURES

- » Minimizes "Differential Hold Down Forces" of dual drain systems
- » Certified Safe flow rate of 540 GPM @ 1.09 FPS
- » ASME/ANSI A112.19.8 2007 and VGBA Standard Compliant
- » Constructed with industry proven rigid material



AV20X20 & AV26X26 EUREKA® ANTI-ENTRAPMENT DRAIN COVERS

APPLICATION

Eureka drain covers unique grating system is designed for new construction and retrofit, to add protection from entrapment. The drain covers prevent objects from being drawn into the line and affecting the recirculation system of the pool.

FEATURES

- » ASME/ANSI A112.19.8 2007 Standard Compliant
- » Certified Safe flow rate of 223 GPM (20x20), 495 GPM (26x26)
- » Made of 12 gauge, 304 stainless steel
- » Anti-vortex design prevents air from getting into the pump
- » Gradual slope with a low profile, skid resistant finish

CATALOG NO.	UPC CODE	DESCRIPTION	SURFACE AREA (SQ. IN)	FITS MAIN DRAIN UP TO (IN)
640-475XV	95432	Waterway 18 x 18" Anti-Entrapment Drain Cover	159.6	18 x 18
AV20X20	95433	Eureka 20 x 20" Anti-Entrapment Drain Cover	73.6	12 x 12 (9 x 9 minimum)
AV26X26	95434	Eureka 26 x 26" Anti-Entrapment Drain Cover	108.9	18 x 18 (12 x 12 minimum)